




Slingbox SOLO DC Power Connector Replacement

Replace the faulty DC Power Connector to bring power back to the Slingbox.

Written By: Nitin Muralidhar

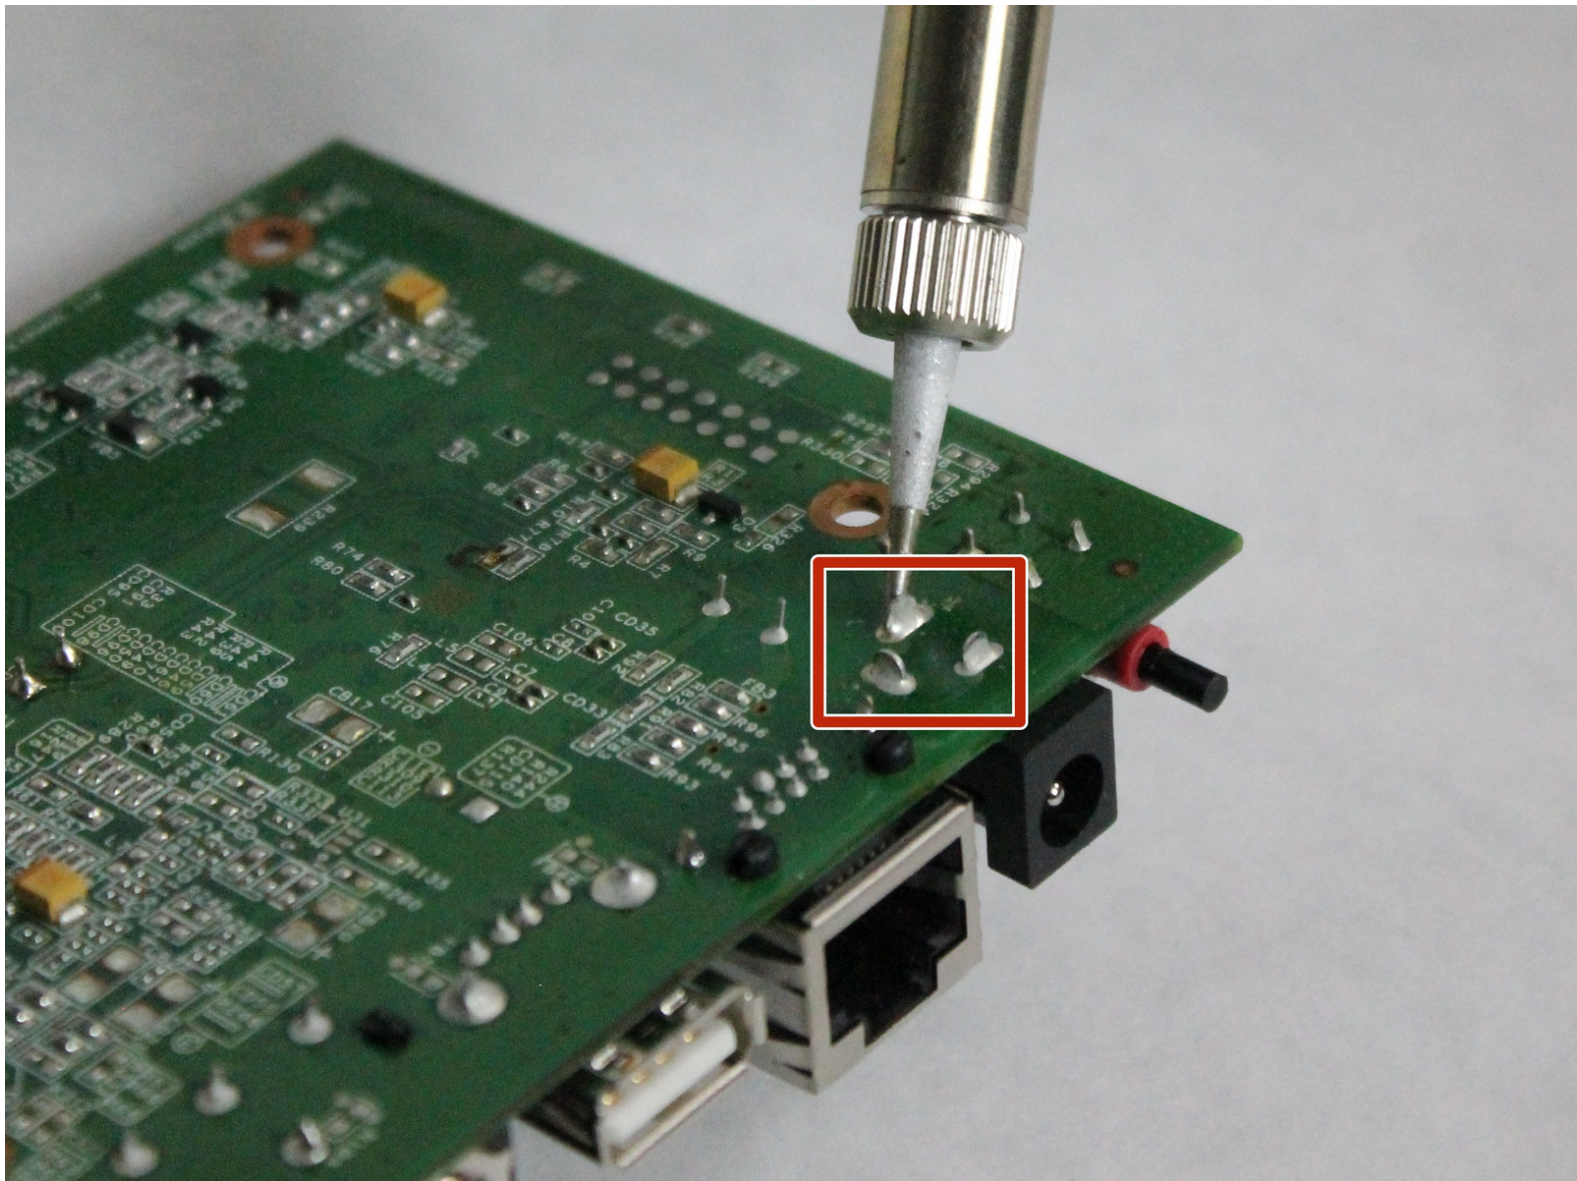

INTRODUCTION

The purpose of this guide is to show the steps necessary to replace the faulty DC power connector.



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [Soldering Station](#) (1)



PARTS:


- [DC Power Connector Partl# CP-102BH-ND](#) (1)

Step 1 — Motherboard

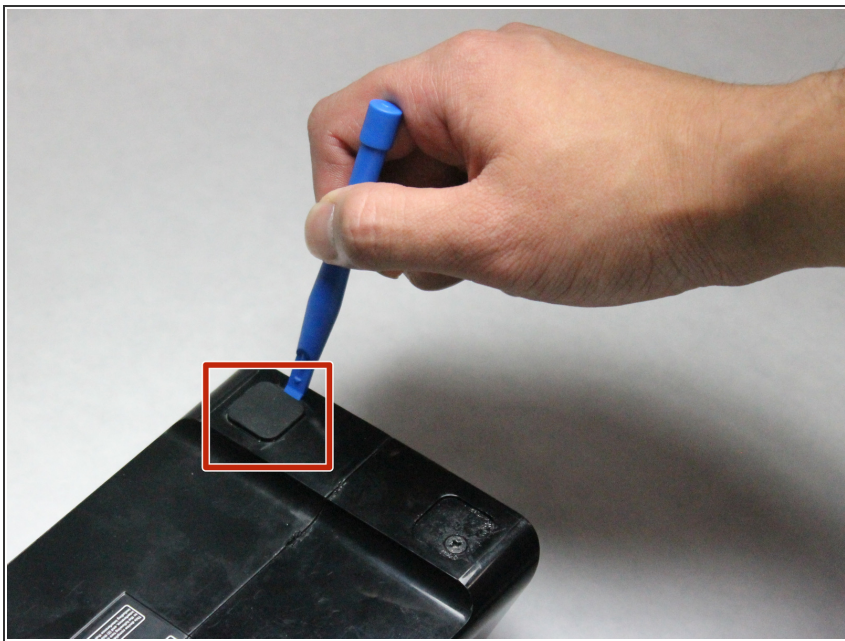

- Use the plastic opening tool to remove the four rubber pads from the bottom of the device.




Step 2

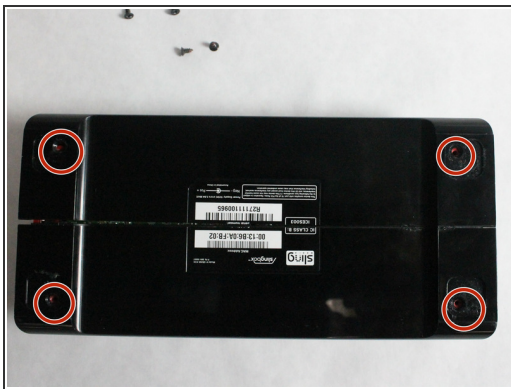

i The Slingbox has four black 5mm screws, one on each corner of the case.

- Remove the four black 5mm screws using the PH1 screwdriver.
- Gently pull and separate the two case covers.


Step 3

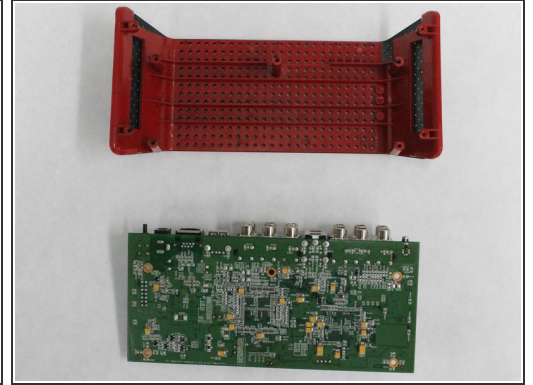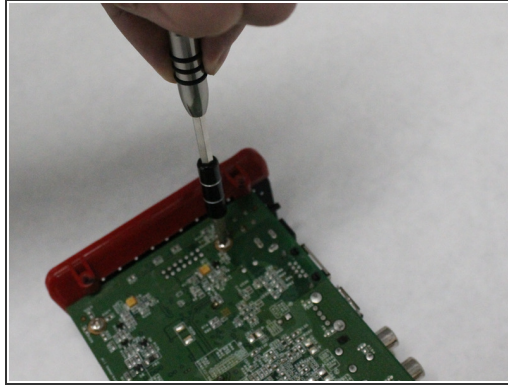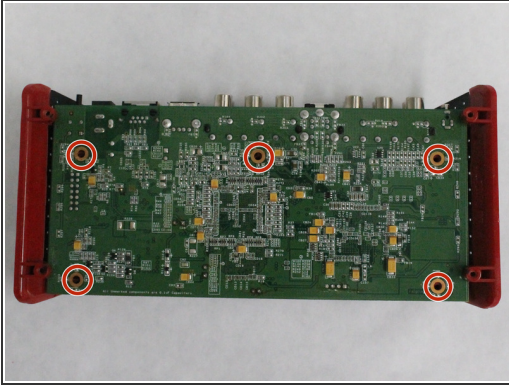

i The motherboard has five silver 5.5mm screws connecting it to the base of the Slingbox.

- Remove the five silver screws on the motherboard using the PH1 screwdriver.
- Gently slide and separate the motherboard from the base.

Step 4 — DC Power Connector

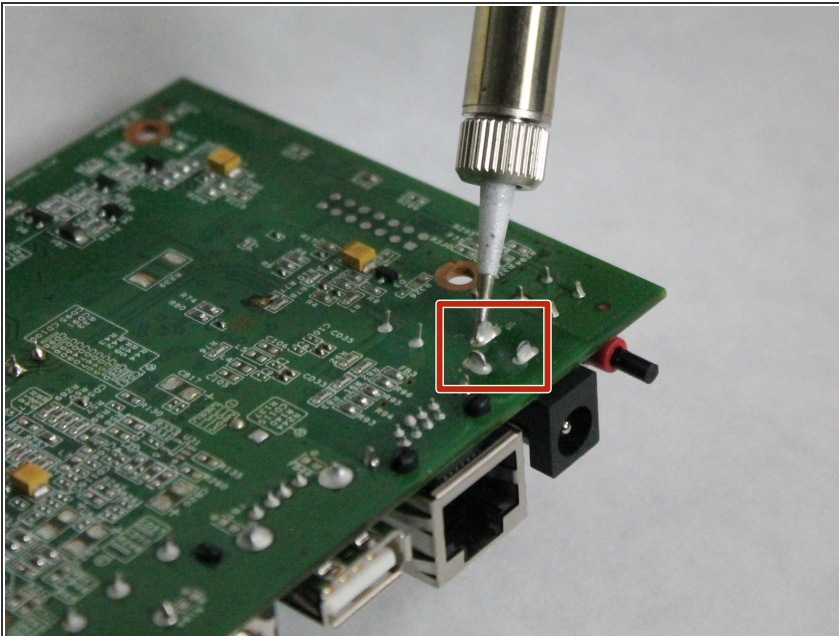

! Do not touch the heated tip of the soldering iron.

i Check [this](#) guide out to learn how to use a soldering iron.

- Desolder all three lead prongs.
- Gently pull the DC power connector from the motherboard.

To reassemble your device, follow the instructions in reverse order.

This document was last generated on 2017-06-22 09:44:23 PM.